


Emergency Series



Emergency Power

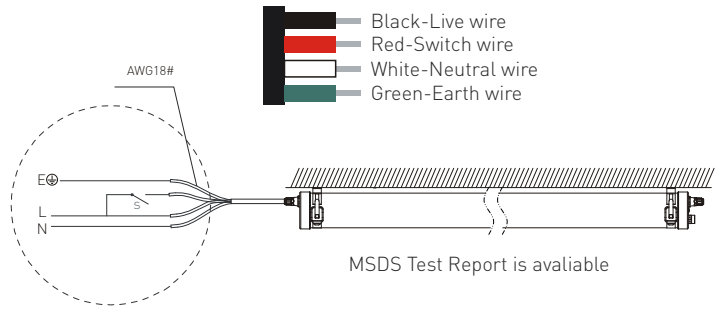

Rechargeable



Emergency Time



3 Years Guarantee

Remark:

- 1 Indicator color (Green – Recharging & Working, Yellow – malfunction)
- 2 Battery can be recharged at least 500 times. In order to maintain the battery well it must be discharged every 3 months.

Dimension




Packaging

Length	Carton Size (6pcs/ctn)	N.W.(CTN)	G.W.(CTN)	20'GP	40'GP	40'HQ
2ft/60mm	29.53*9.84*7.09inch (750*250*180mm)	16.53lb (7.5Kg)	18.74lb (8.5Kg)	4986pcs	10368pcs	11520pcs
4ft/1200mm	53.15*9.84*7.09inch (1350*250*180mm)	25.35lb (11.5Kg)	29.76lb (13.5Kg)	2592pcs	5190pcs	5760pcs
5ft/1500mm	64.96*9.84*7.09inch (1650*250*180mm)	31.97lb (14.5Kg)	37.48lb (17Kg)	1950pcs	4536pcs	5040pcs

Installation

① Ceiling Mounted Installation

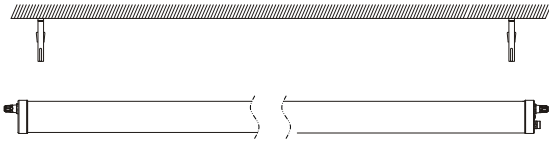

* Ceiling Mounted accessories are ShineLong Configuration.

Standard




#304 Bracket

Optional



Rotatable Buckle
(#316 Stainless steel)

② Suspending Installation

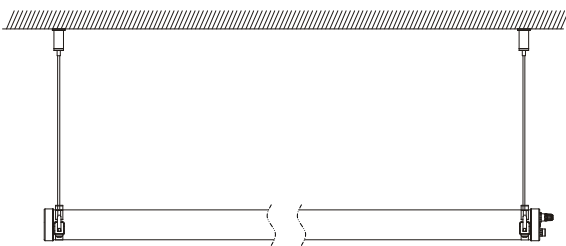

* Suspended accessories need to be paid additionally.

Accessory part



#304 Bracket



Suspension wires

Fixing nuts

Fixed bushings

Fixing screws

Self-tapping screws

Slotted plastic screws




All the operations must be in the condition of power off



The luminaires are intended for indoor use or under shelter for outdoor use.

1. Please note that DO NOT use this product in the following places/application. The place has a large quantity of chemical corrosive substance, such as: chemical plant and stockyard etc.
2. The place has poor temperature conditions, the applicable operating temperature of the lamp is $-20\sim+40^{\circ}$, Sharply temperature variation, which would increase the risk of damage to the lamp.
3. Pls note that lamp must be reliable grounding. Make sure that your application is completely connected to ground firstly. Otherwise, it will do heavy damage to lamp if lamp's earth wire can not be efficiently connected to the ground.



Applications

