





Artemis Linear LED





Chilled
Food



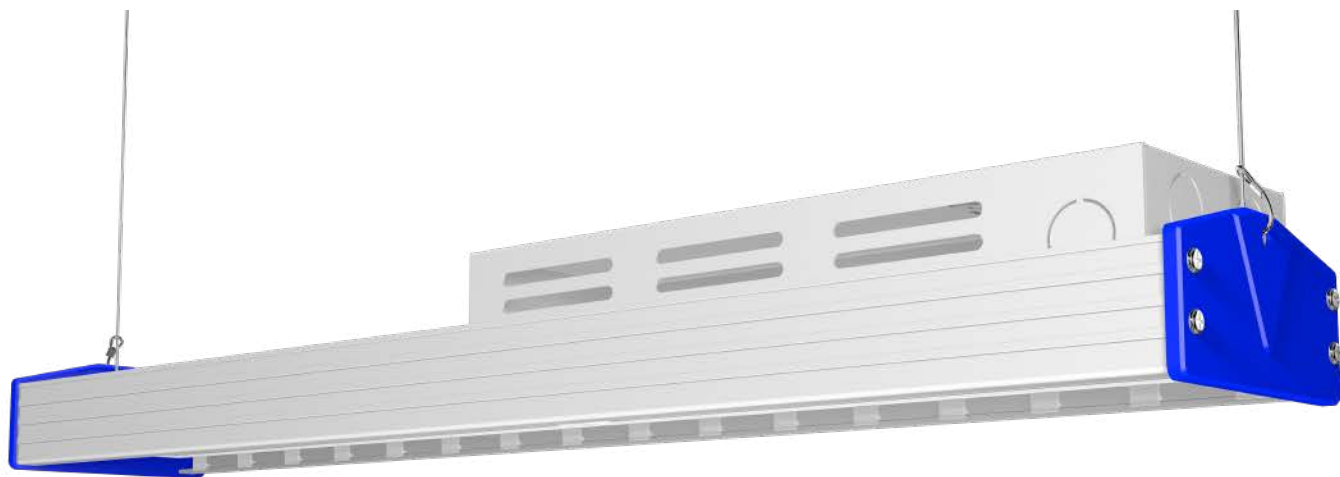


Product Description

- High luminous efficacy up to 152lm/w
- Separate heat sink for led driver and led chip
- Intelligent lighting: Zigbee wireless control, daylight sensor dimming, microwave sensor dimming, three in one(0-10v,PWM, resistance) dimming available
- Colorful housing can be customized

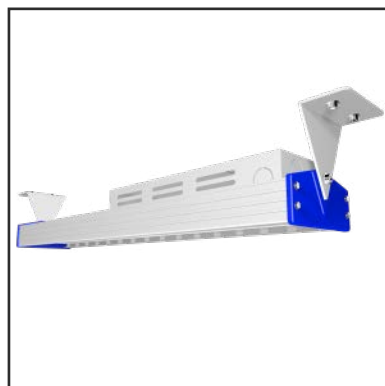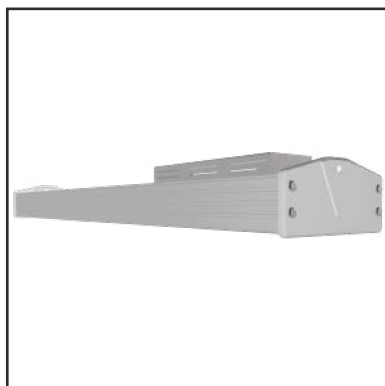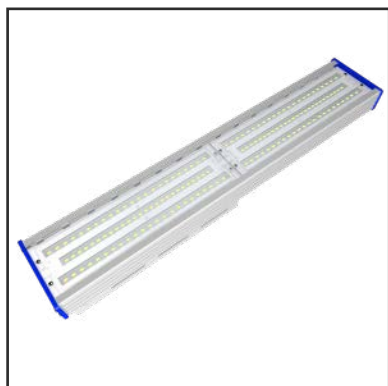


kWh/1000h

Features

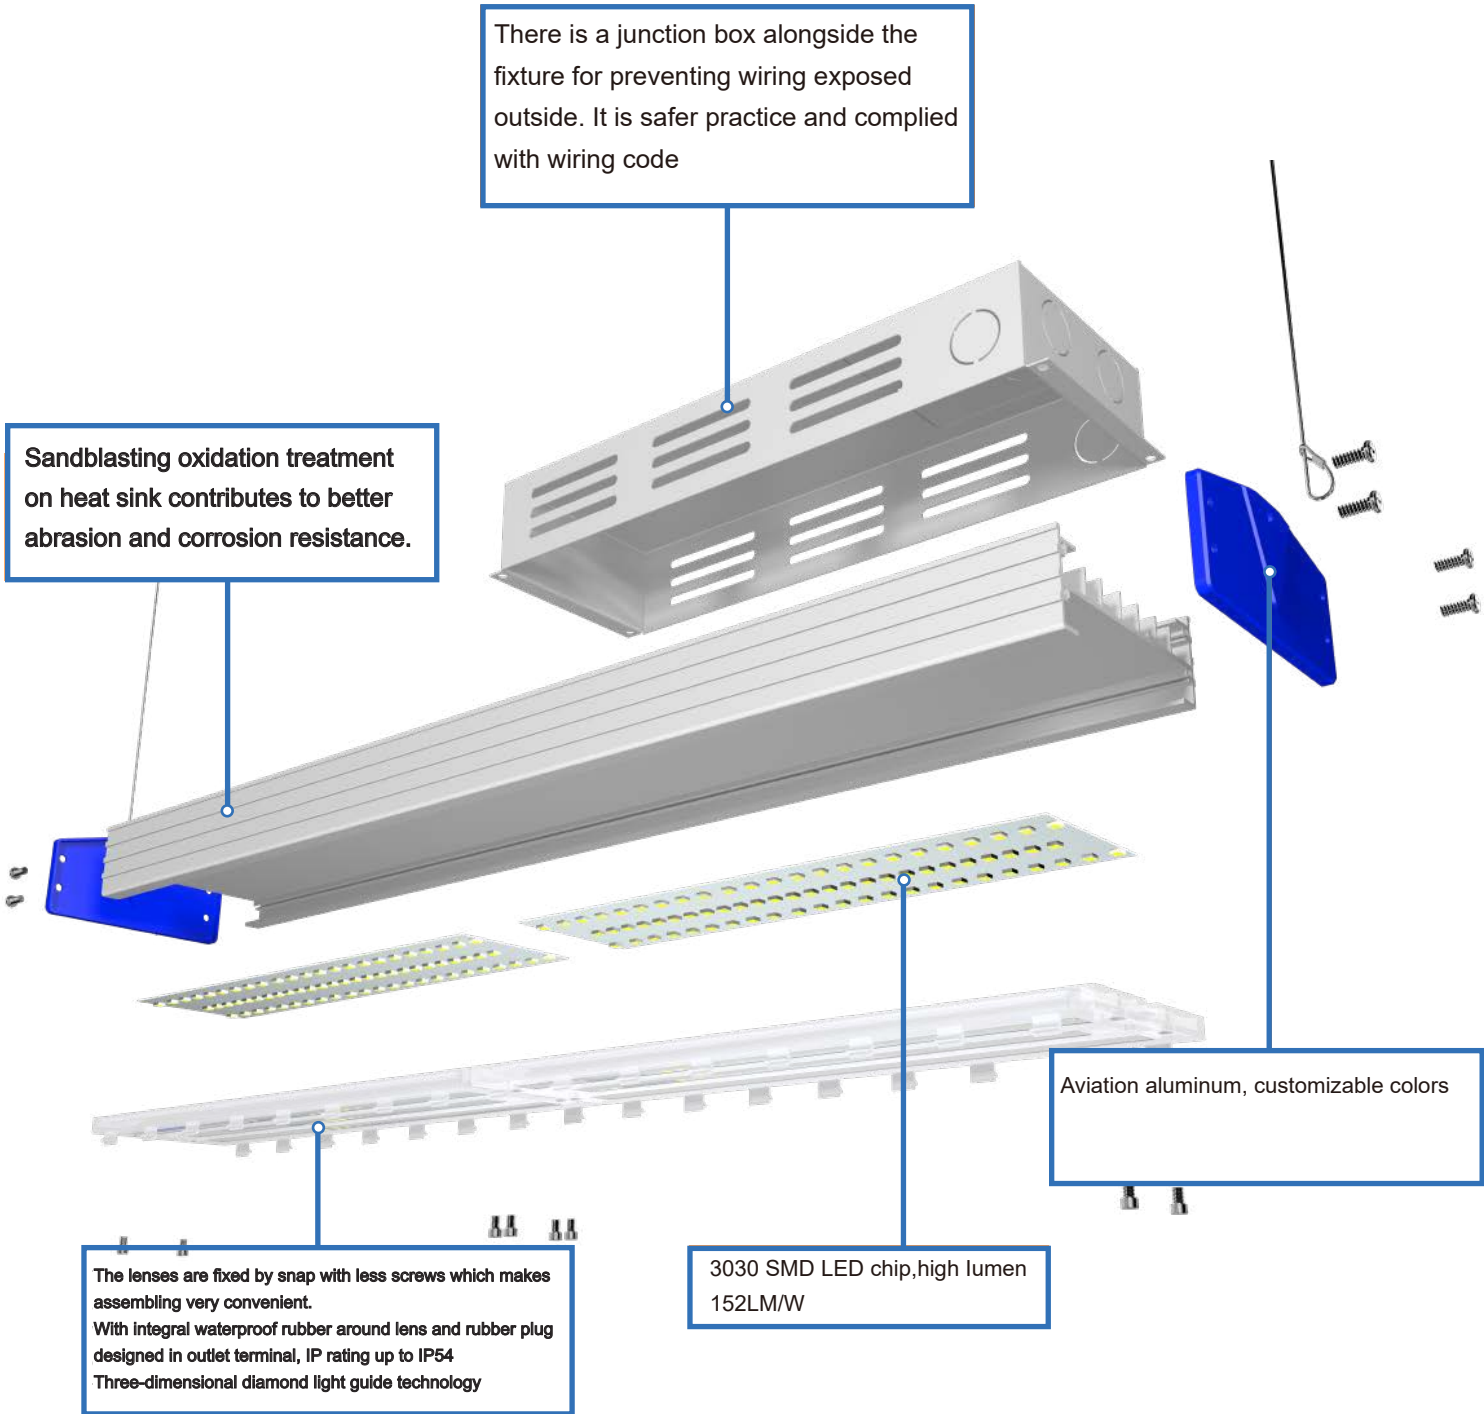

Accessories

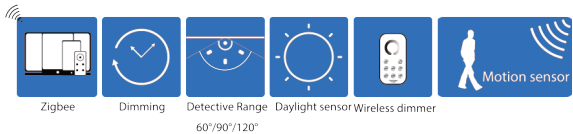

Motion sensor




Daylight sensor



Zigbee wireless control


50W SPECIFICATIONS

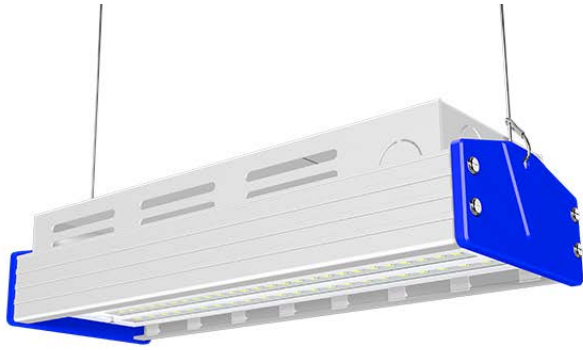


Technical Data

| | |
|-------------------|---|
| Model Number | Artemis Linear 50 |
| Power | 50W |
| Luminous Efficacy | 152lm/W |
| Lumen Output | 7600lm |
| LED Quantity | 84pcs |
| Dimension | 305*110*54mm |
| Beacon Pattern | 3000K 4000K 5000K 6000K (Custom Option) |
| CRI | >80Ra |
| System Efficiency | ≥90% |
| Beam angle | 60°/90°/120° |

Product Dimensions

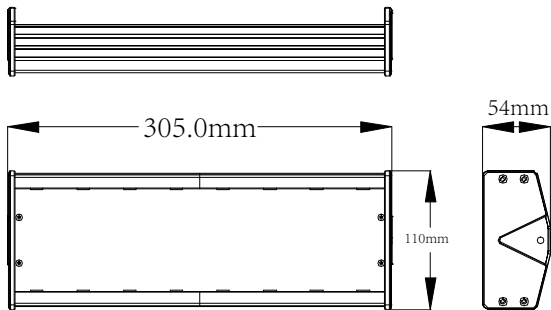

Photometrics

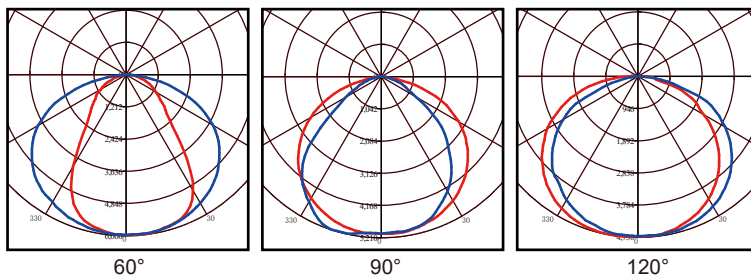

Electrical Details

| | |
|---------------------------|----------------------|
| Input Voltage | AC100-277V/347V/480V |
| Power Frequency | 50-60Hz |
| Output Voltage | DC36-48V |
| Power Efficiency | >92% |
| Power Factor | ≥0.95 |
| Total Harmonic Distortion | ≤15% |
| Dimmable | Yes (Optional) |

Other Details

| | |
|-----------------------|-------------------------------------|
| IP Rating | IP54 |
| Lifespan | 100,000+ Hours |
| Storage Temperature | -20°~65°C |
| Operating Temperature | -20°~55°C |
| Luminaire Net Weight | 1.4KG |
| Certification | UL, DLC Premium, SAA, TUV, VEET, CB |
| Color of housing | Blue+white(customized) |


100W SPECIFICATIONS



Technical Data

| | |
|---------------------------|---|
| Model Number | Artemis Linear 100 |
| Power | 100W |
| Luminous Efficacy | 152lm/W |
| Lumen Output | 15200lm |
| LED Quantity | 168pcs |
| Dimension | 600*110*54mm |
| Color Temperature Pattern | 3000K 4000K 5000K 6000K (Custom Option) |
| CRI | >80Ra |
| System Efficiency | ≥90% |
| Beam angle | 60°/90°/120° |


Product Dimensions

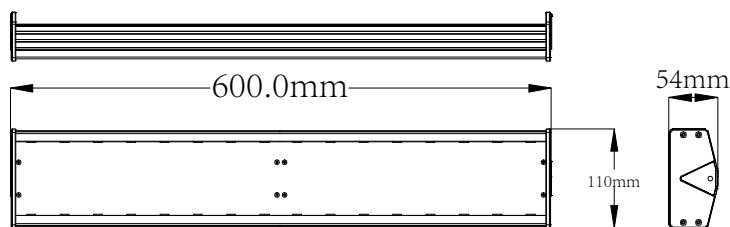

Electrical Details

| | |
|---------------------------|----------------------|
| Input Voltage | AC100-277V/347V/480V |
| Power Frequency | 50-60Hz |
| Output Voltage | DC36-48V |
| Power Efficiency | >92% |
| Power Factor | ≥0.95 |
| Total Harmonic Distortion | ≤15% |
| Dimmable | Yes (Optional) |

Photometrics

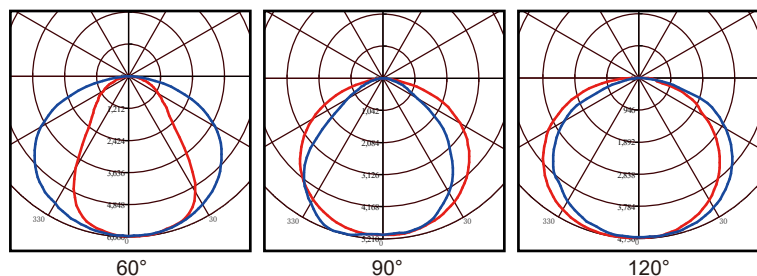

Other Details

| | |
|-----------------------|-------------------------------------|
| IP Rating | IP54 |
| Lifespan | 100,000+ Hours |
| Storage Temperature | -20°~65°C |
| Operating Temperature | -20°~55°C |
| Luminaire Net Weight | 2.3KG |
| Certification | UL, DLC Premium, SAA, TUV, VEET, CB |
| Color of housing | Blue+white(customized) |


150W SPECIFICATIONS



Technical Data

| | |
|-------------------|---|
| Model Number | Artemis Linear 150 |
| Power | 150W |
| Luminous Efficacy | 152lm/W |
| Lumen Output | 22800lm |
| LED Quantity | 252pcs |
| Dimension | 895*110*54mm |
| CCT | 3000K 4000K 5000K 6000K (Custom Option) |
| CRI | >80Ra |
| System Efficiency | ≥90% |
| Beam angle | 60°/90°/120° |


Product Dimensions

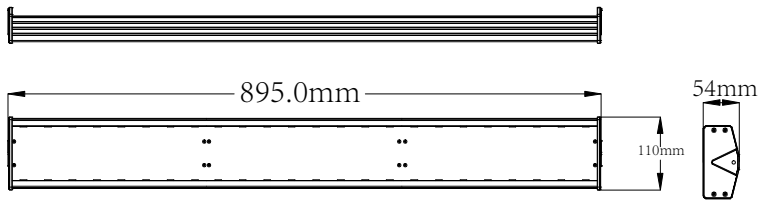

Electrical Details

| | |
|---------------------------|----------------------|
| Input Voltage | AC100-277V/347V/480V |
| Power Frequency | 50-60Hz |
| Output Voltage | DC36-48V |
| Power Efficiency | >92% |
| Power Factor | ≥0.95 |
| Total Harmonic Distortion | ≤15% |
| Dimmable | Yes (Optional) |


Photometrics

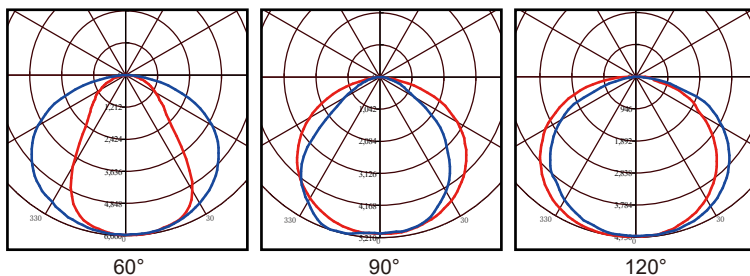


Other Details

| | |
|-----------------------|--------------------------------|
| IP Rating | IP54 |
| Lifespan | 100,000+ Hours |
| Storage Temperature | -20°~65°C |
| Operating Temperature | -20°~55°C |
| Luminaire Net Weight | 3.6KG |
| Certification | UL,DLC Premium,SAA,TUV,VEET,CB |
| Color of housing | Blue+white(customized) |


200W SPECIFICATIONS

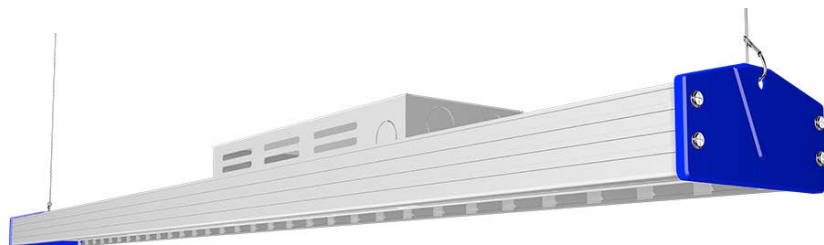

Product Dimensions

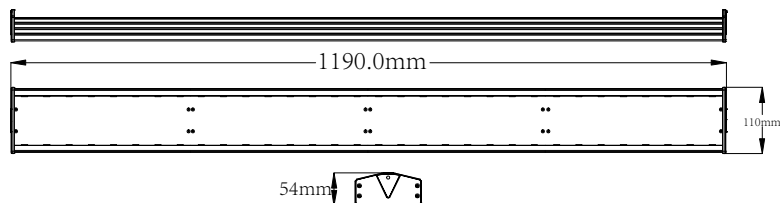

Photometrics

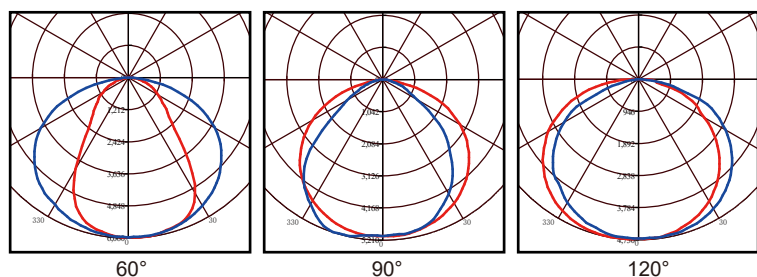

Technical Data

| | |
|-------------------|---|
| Model Number | Artemis Linear 200 |
| Power | 200W |
| Luminous Efficacy | 152lm/W |
| Lumen Output | 30400lm |
| LED Quantity | 336pcs |
| Dimension | 1190*110*54mm |
| Beacon Pattern | 3000K 4000K 5000K 6000K (Custom Option) |
| CRI | >80Ra |
| System Efficiency | ≥90% |
| Beam angle | 60°/90°/120° |

Electrical Details

| | |
|---------------------------|----------------------|
| Input Voltage | AC100-277V/347V/480V |
| Power Frequency | 50-60Hz |
| Output Voltage | DC36-48V |
| Power Efficiency | >92% |
| Power Factor | ≥0.95 |
| Total Harmonic Distortion | ≤15% |
| Dimmable | Yes (Optional) |

Other Details

| | |
|-----------------------|--------------------------------|
| IP Rating | IP54 |
| Lifespan | 100,000+ Hours |
| Storage Temperature | -20°~65°C |
| Operating Temperature | -20°~55°C |
| Luminaire Net Weight | 4.3KG |
| Certification | UL,DLC Premium,SAA,TUV,VEET,CB |
| Color of housing | Blue+white(customized) |


250W SPECIFICATIONS



Technical Data

| | |
|-------------------|---|
| Model Number | Artemis Linear 250 |
| Power | 250W |
| Luminous Efficacy | 152lm/W |
| Lumen Output | 38000lm |
| LED Quantity | 336pcs |
| Dimension | 1190*110*54mm |
| CCT | 3000K 4000K 5000K 6000K (Custom Option) |
| CRI | >80Ra |
| System Efficiency | ≥90% |
| Beam angle | 60°/90°/120° |


Product Dimensions

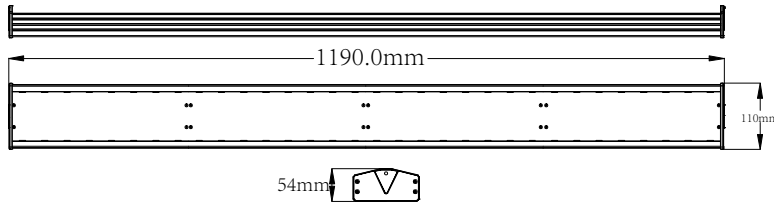

Electrical Details

| | |
|---------------------------|----------------------|
| Input Voltage | AC100-277V/347V/480V |
| Power Frequency | 50-60Hz |
| Output Voltage | DC36-48V |
| Power Efficiency | >92% |
| Power Factor | ≥0.95 |
| Total Harmonic Distortion | ≤15% |
| Dimmable | Yes (Optional) |



Photometrics

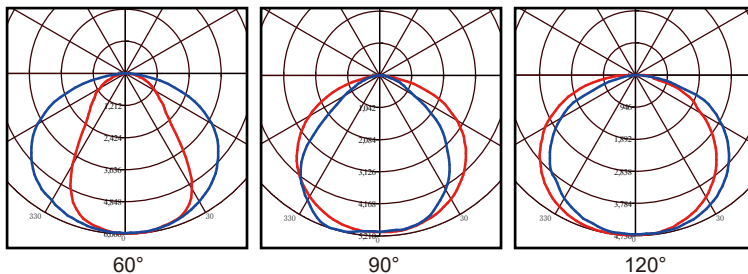

Other Details

| | |
|-----------------------|--------------------------------|
| IP Rating | IP54 |
| Lifespan | 100,000+ Hours |
| Storage Temperature | -20°~65°C |
| Operating Temperature | -20°~55°C |
| Luminaire Net Weight | 4.75KG |
| Certification | UL,DLC Premium,SAA,TUV,VEET,CB |
| Color of housing | Blue+white(customized) |

Installation

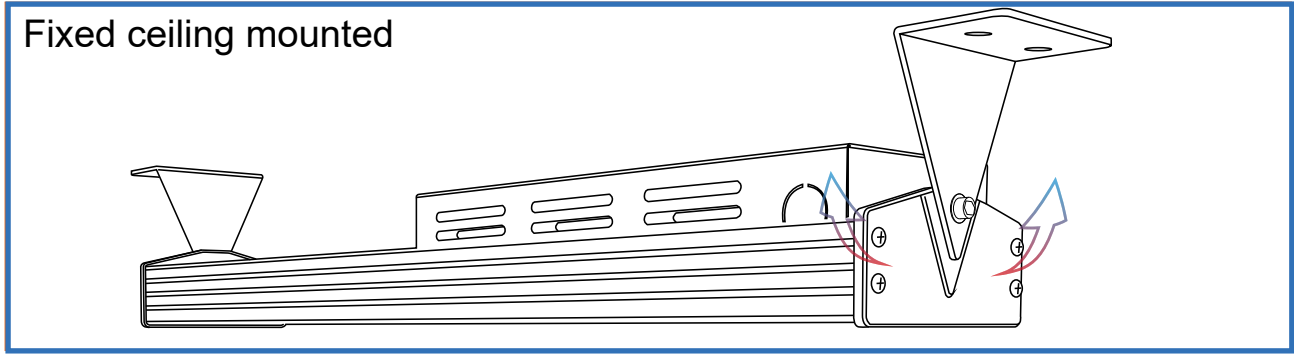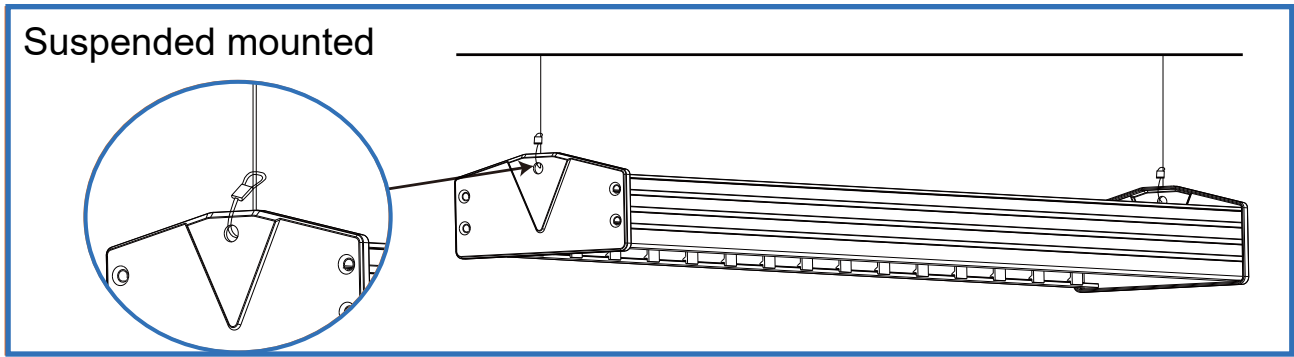

Application



Widely use in Factory, Workshop, Warehouse, Logistics Center, Exhibition Hall, Stadium, Gas Station,- Supermarket and etc.